


DPH-260H Full-Automatic Roller-plate High Speed Blister Packing Machine

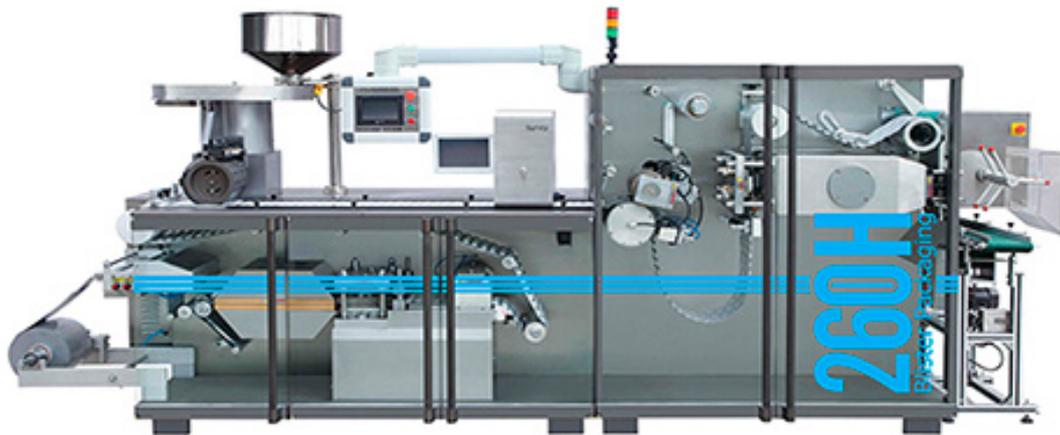

DPH-260H Roller-plate high speed blister packing machine collects flat plate type forming and roller sealing as incorporator. It applies to medicine packaging, such as variety specification of sugar coated or uncoated tablet, capsule, soft gel, injection and so on. It's also suitable for packing small hardware, electronical element, medical devices and foods which shapes are similar with above pharmaceuticals.

Feature

1. High speed, high stability and high accuracy when machine running.
2. Width of PVC and PTP both are 260mm, which designing is more humanized.
3. Flat plate is front pressure to form, roller plate type to seal, thus making the grid pattern more beautiful.
4. It can be equipped with universal feeding system or special pipeline feeding system according to the shape of medicines.
5. PLC human-machine interface control system to operate, stepless frequency inverter to main transmission. Each station adopts an independent worm gear reducer and link universal coupling device.
6. The cutting frequency is up to 40-200blister plates/minute (the speed is adjustable according to the format length).
7. Printing batch numbers and expiry date, and plate impressing adopts plate drawing type handy replacement structure.
8. Lengthen filling platform which can improve yield and easy to be equipped with camera detection, automatic eliminate convey system, and conveyor link to automatic carton packing machine.

9. Cross cutting (borderless cutting) will not waste packing material This blister machine can save packing materials about 10%.

10. Adopting servo traction system, make stroke length be adjustable arbitrary, accurate and consistent. The cutting position is easy to adjust which make plate perfect.

11. This high speed roller-plate blister packing machine is easy to replace mould and guide rail. The mould for ALU-PVC adopts orientation chute, and the guide rail adopts integral aluminum alloy structure, which make installation be more convenient.

Specification

Cutting frequency:	40~200 times/minute
Max.forming area:	250×250mm
Max.forming depth:	12mm
Travel adjusting:	150~250mm
Size of standard plate:	80×57mm
Width and thickness of PVC and PTP:	PVC:260×0.15~0.30mm PTP:260×0.02~0.03mm
Power supply:	380V 50HZ, main motor : 1.1KW heating:10.8KW
Air Capacity :	≥0.5m ³ /min
Cooling water:	Tap water or cycling water, 60L/H
Overall size:	4350×1070×2200mm
Weight:	3000kg